Front Surround Speakers Bracket Kit

Gen2

Assembly Manual And Accessories



Assembly instruction manuals available at:

http://bit.ly/ow-manuals

V2.2 060726

by SimFab

WARNINGS:

Proceed with caution and extra attention when warning signs are present during installation instructions manual.

WARNING

Choking hazard, small parts. Not for children under 5 years old.



WARNING

Keep hands and fingers clear of pinching points, and hinging metal parts.



If your item is damaged, defective or missing parts, please contact us first directly at Email: info@SimFab.com or
Toll Free: 1-888-299-2746

As the manufacturer, our knowledge of your new product ensures that we will be able to assist you promptly and accurately.

For invoices and other price information, please refer to your market place account for more details. Alternatively, you can always email us at info@SimFab.com

Table of Contents

Parts list.....6
Parts images.....7
Clamping bracket assembly and installation.....8
Mounting bracket installation for speakers with insert 10
Specs, terms and conditions.....13

Parts list

1. Speaker tray assembly (2)
    1.1. Speaker tray (2)
    1.2. Clamping bracket, front (2)
2. Clamping bracket, rear (2)
    M8, 20mm bolt (2)
    M8 washers (6)
    M8 lock nut (2)
3. Optional speaker L bracket (2)
4. Reusable sticky pad (4)
5. Cable management Velcro ties (6)
6. Plastic spacer washer (2)
7. Logitech speakers mounting bolt (2)
8. Clamping bracket hardware.
    8.1. M6, 25mm bolt (4)
    8.2. M6 washer (4)
    8.3. M6 nut (4)

Required tools, included in base package SimFab monitor stand or cockpit.

5mm Hex key
10mm open wrench
13mm open wrench
Phillips screwdriver



Front surround speaker tray kit comes pre-assembled for speakers placed on trays with optional brackets for speakers with mounting inserts. Position clamping mechanism on vertical tube at desired height and connect front to rear clamping bracket with included hardware as shown.

⚠ Do not over tighten clamping bolts to avoid damage on metal tubes, clamping brackets or tube surface. Ensure clamping bolts are tightened equally.



Clamping brackets are designed to mount on either 30mm or 35mm diameter tube. Ensure brackets are aligned against one side of 30mm tube and maintain square and plumb bracket and tube.

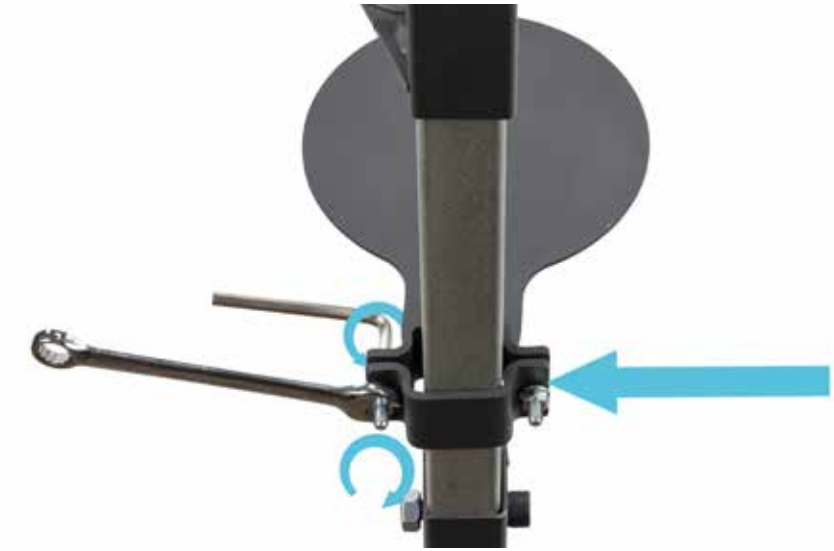

Remove protective film from reusable double side sticky pads and place them on bottom of speaker. Place speaker on center of tray. Sticky pads are reusable. Wash with warm water to refresh adhesive.

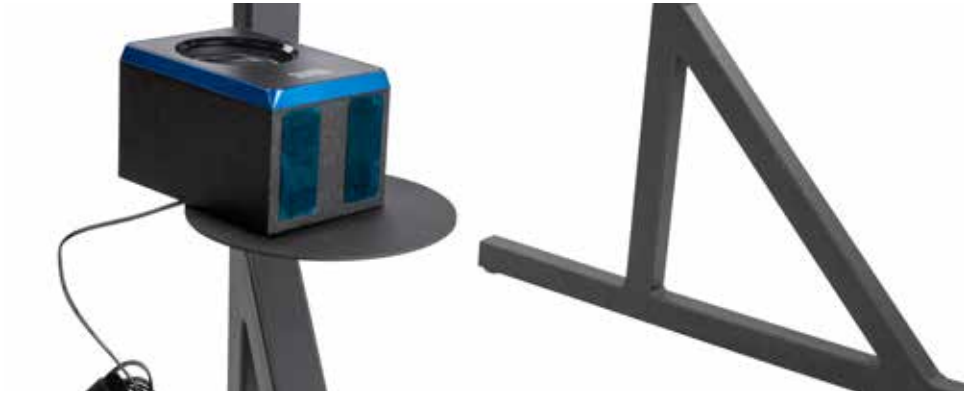

Adjust speaker trays to desired angle. Use cable Velcro ties to route speaker wires neatly around stand frame.





Optionally replace speaker tray with speaker L bracket for speakers with mounting insert. Disassemble tray from front clamping bracket and re-assemble hardware in the same way to L bracket in the following order top to bottom: Bolt, washer, clamping bracket, washer, L bracket, washer, locknut.



Install speaker to L bracket. Use plastic spacer washer to allow wires clearance. Included in the kit are pair of special Logitech speakers bolts. For different brand speakers, different hardware may be required, not included in this kit.



Adjust speaker and desired angle. Use cable Velcro ties to route speaker wires neatly around stand frame.







Make final adjustments and enjoy!



Specifications:

Recliner: max: 170 degrees
Construction: tubular steel frame with elastic strap supports
Seat Materials: high-density cold cure foam filling; Fabric, Steel chassis

Instructions during use and care:

Move simulator around with caution to avoid collision.
Keep out of direct sunlight and outdoor use.
Watch fingers when adjusting recliner.
Placing heavy or sharp objects on the seat may damage the surface material.
Do not use abrasive or chemically aggressive materials on the seat.
Use dry cloth or soft brush to clean the chair.

Dimensions:



Warranty Information

Return Policy

Terms And Conditions

http://homeracer.com/ow-termsandconditions.html













